


技术参数 Electrical specifications

注：电机全黑

相数 Phase	2
步距角(°) Step Angle	18 \pm 5%
绝缘等级 Insulation Class	B级
绝缘电阻 Insulation resistance	100M Ω min.500VDC
转子惯量(g.cm ²) Rotor Inertia	2700

接线图 Wiring diagram:


单极性 Unipolarity



串联 Concatenation



并联 Parallel Connection

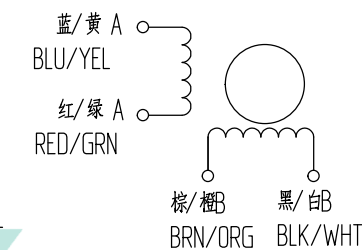

	单极性 Unipolarity	串联 Concatenation	并联 Parallel Connection
相电流(A) Current	4.2	3	6
相电阻(Ω) Resistance	0.96 \pm 10%	1.92 \pm 10%	0.48 \pm 10%
相电感(mH) Inductance	4 \pm 20%	16 \pm 20%	4 \pm 20%
静力矩(N.m) Holding Torque	4.6	6.5	6.5