


技术参数 Electrical specifications

注: 电机全黑

相数 Phase	2
步距角(°) Step Angle	18±5%
绝缘等级 Insulation Class	B级
绝缘电阻 Insulation resistance	100M Ω min. 500VDC
转子惯量(g.cm²) Rotor Inertia	1400

接线图 Wiring diagram:


单极性 Unipolarity



串联 Concatenation



并联 Parallel Connection

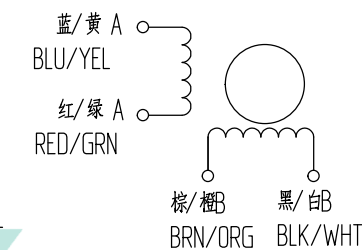

	单极性 Unipolarity	串联 Concatenation	并联 Parallel Connection
相电流(A) Current	4.2	3	6
相电阻(Ω) Resistance	0.76±10%	1.52±10%	0.38±10%
相电感(mH) Inductance	3±20%	12±20%	3±20%
静力矩(N.m) Holding Torque	3.3	4.5	4.5