

## 60 Series Motor

### EO60 Series Specification

Accuracy	± 5%(full step, unload)
Temperature	85℃ MAX
Environment	-25℃~+55℃
Insulation Resistance	100MΩ min 500VDC
Pressure	500VAC for one minute
Radial runout	0.02 Max(450g-load)
Axial runout	0.08 Max(450g-load)



CNCPARTS



shop.cncparts.ir


یک خرید مطمئن

## Electrical Specification


### EO 60MM Series Technical Specification

Model	Phase	Step Angle	Torque (NM)	Current (A)	Inductance (mH)	Resistance (ohm)	Lead	Inertia (g.cm)	Detent Torque(N.cm)	Motor length(mm)	Weight (kg)
EO60-08	2	1.8	0.85	2.5	2.2	1	4	200	3	45	0.55
EO60-16/25	2	1.8	1.6	2.5	4.2	1.3	4	350	4	56	0.7
EO60-16/42	2	1.8	1.6	4.2	1.2	0.4	4	350	4	56	0.7
EO60-18/30	2	1.8	1.8	3	2.3	0.8	4	450	5	65	0.85
EO60-18/42	2	1.8	1.8	4.2	1.2	0.55	4	450	5	65	0.85
EO60-22/25	2	1.8	2.2	2.5	6.5	1.8	4	550	7	76	1.15
EO60-22/30	2	1.8	2.2	3	3.5	1	4	550	7	76	1.15
EO60-20/42	2	1.8	2.2	4.2	1.8	0.6	4	550	7	76	1.15
EO60-26/30	2	1.8	2.6	3.0	5.5	1.4	4	780	12	89	1.4
EO60-26/42	2	1.8	2.6	4.2	2.8	0.7	4	780	12	89	1.4
EO60-30	2	1.8	3.0	4.2	3	0.7	4	900	16	100	1.6
EO60-36	2	1.8	3.6	4.2	3.5	0.85	4	900	16	112	1.8

## Mechanical Dimension(UNIT:mm)

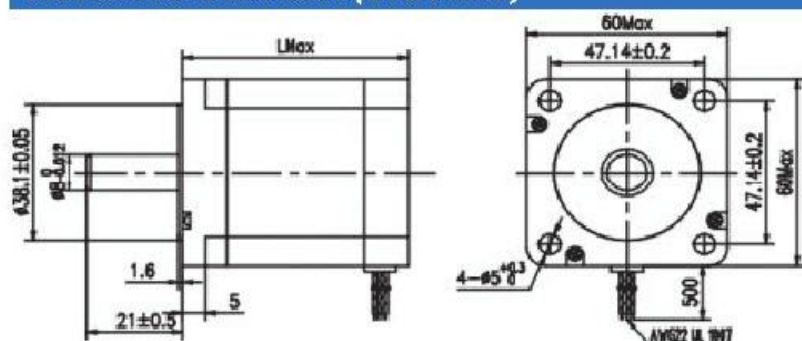

## Diagram Wiring:

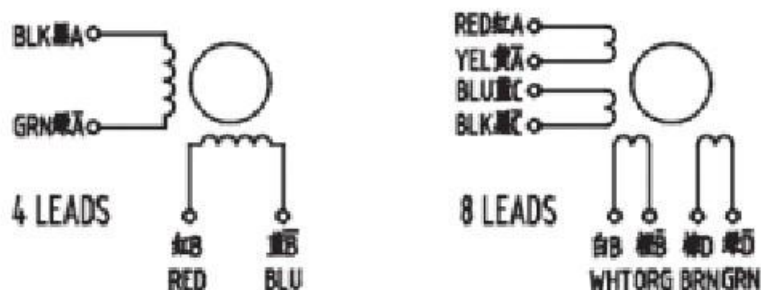

تهران، خیابان سعدی جنوبی، چهارراه اکباتان کوچه ناظم الاطبا شمالی، ابتدای کوچه، پلاک ۱۶۷  
۳۳۹۵۹۳۲۶ - ۳۳۹۵۹۷۵۶ - ۳۳۹۵۹۰۳۴ - ۳۳۵۳۲۱۹۴ - ۳۶۶۱۹۵۱۰ - ۳۶۶۱۹۳۹۰